



Kit includes : Base, bungee pole set,
top rail and carry bag



Assemble the bungee pole and insert into the base



Lean the bannerstand backwards and
extend the banner by lifting the top rail
until the complete image is visible




Finally secure the banner into position
by locating the top rail hole
with the bungee pole


Take care when lowering the banner
to prevent damage to the graphic
(do not drop)

When changing banners please refer
to separate instruction sheet UI099

To gain access to the roller mechanism

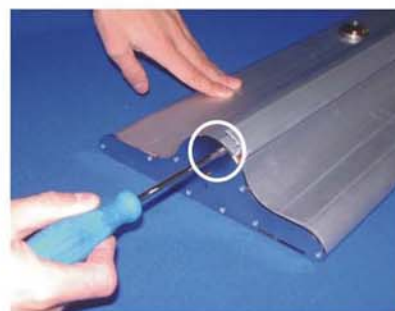

Using a cross-head
screwdriver, unfasten
the top screw on both
ends of the base

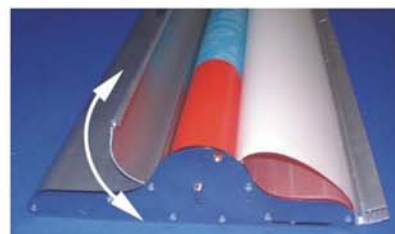

Rotate the base lid
to expose the roller
mechanism

Technical Specification

Visible graphic area : 2155mm approx (H) x 600mm to 1200mm (W)
depending upon the version supplied

Note : Add 200mm to the graphic length to allow for the roller
Unit weight inc. carry bag : 5.2kg approx (800mm version)

Guidelines for Graphic substrates

- 1, Material thickness must be between 225 and 300 microns in total
- 2, The substrate must be pliable and suitable for roller bannerstands
- 3, After fitting, the graphic should be left for 24 hours before use
to ensure the adhesive bonds sufficiently