






Kit includes : base with one or two cartridges, bungee pole set, top rail(s) and carry bag



1 Slide open both pole retainers and remove the bungee pole set from the base



2 To open, **slide down both** locking tabs on the left and right sides of the base

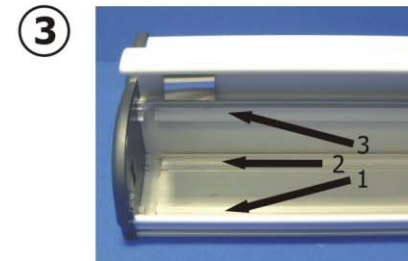

3 Lift open the lid and note the 3 grooves inside the base




4 Place the 1st banner cartridge into the base, ensure the cartridge rod is seated correctly into groove 1. Rotate the cartridge until the remaining rods are seated into grooves 2 and 3



5 To close, **press down firmly** onto both left and right sides of the lid until an audible click is heard. To lock, **slide up both** locking tabs into the position shown above. Repeat steps 4 and 5 for the 2nd cartridge




6 Assemble the bungee pole and insert into the base



7 Lean the bannerstand backwards and extend each banner by lifting the top rail until the complete image is visible

Secure each banner into position by locating the bungee pole into the top rail slots

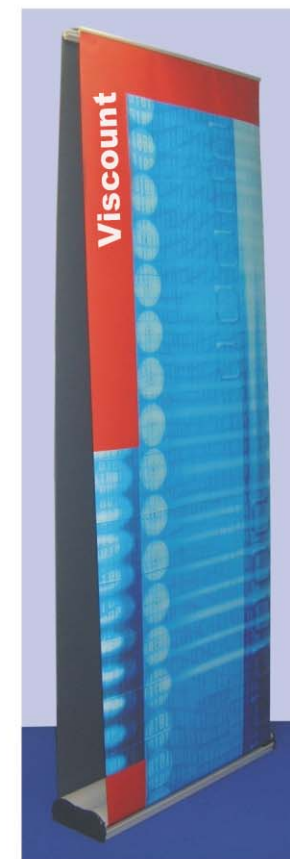

Technical Specification

Visible graphic area : Between 2180mm & 2190mm approx (H) x 600mm to 1200mm (W) depending upon the version supplied
 Note : Add 200mm to the graphic length to allow for the roller
 Unit weight inc. carry bag : 8.3kg approx (800mm version)

Guidelines for Graphic substrates

- 1, Material thickness must be between 225 and 300 microns in total
- 2, The substrate must be pliable and suitable for roller bannerstands
- 3, After fitting, the graphic should be left for 24 hours before use to ensure the adhesive bonds sufficiently

Notes

- 1, For loading graphics into the cartridge refer to separate instruction sheet UI095
- 2, Take care when lowering the banner (do not drop) to prevent damage to the graphic